



Hands free Intercom Product Information and Installation Instructions

Part # M-INT-SY256

Included

Intercom module, 10 ft. front cable, 20 ft rear cable, 2 switches, 2 microphones and 2 speakers with mounting hardware.

Installation

With two #8 screws mount the intercom module toward the front of the vehicle so the long cable will reach the rear and the shorter cable for the front of the vehicle. Connect the red wire to ignition 12 volts (fused 3 amp), black wire to chassis ground (Fig 1).


Plug the harnesses into the intercom module (Fig 2).

Mount the speakers, on /off switches and microphones in your desired locations. To avoid feedback noise mount the speaker and microphone not pointing at each other and at least 2 feet apart.


The microphone and switch comes plugged into the harness minus plugging in the speakers. If the components are unplugged during installation refer to (fig 3) to reconnect.



(Fig 1)

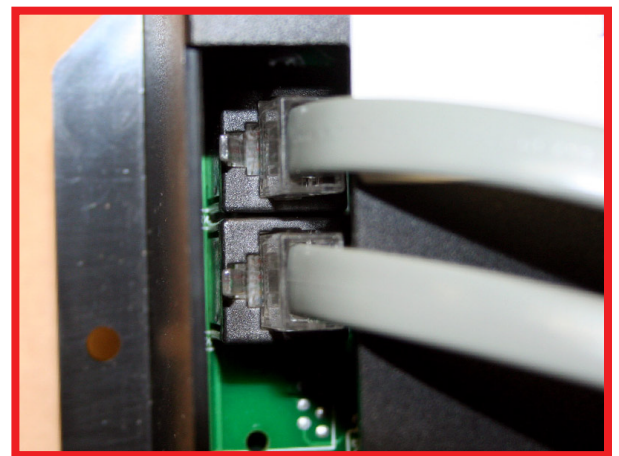

(Fig 2)

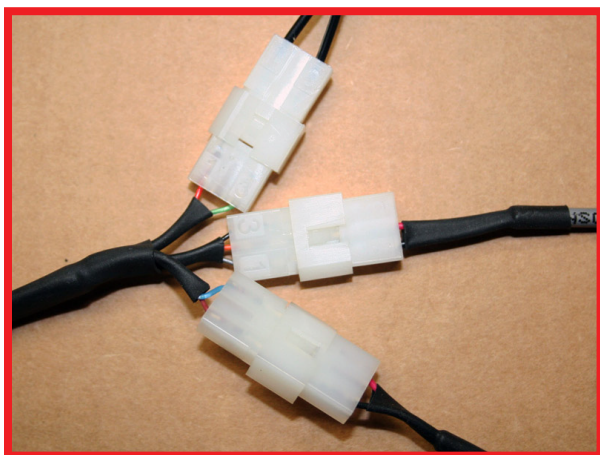

(Fig 3)

Speaker Connector

Can only plug in one way because the male and female plugs are in reverse.

Microphone Connector

Black to brown wire. Red to blue wire.

Switch Connector

Black to grey wire. Red to orange wire

Operation

Either front or rear switch will turn on the intercom for hands free talk and listen. Privacy for the rear compartment is achieved by not installing the front switch. Front privacy requires no rear switch installed.