



Public Address System Product Information and Installation Instructions

Part # M-INT-SY256P

Included

PA module, (2)9 ft. cables for the microphone and switch plate, (2) speakers with mounting hardware.

Installation

With two #8 screws mount the PA module toward the front of the vehicle so the cables will reach the location where the microphone and switch panel (fig 3) will be located. Connect the red wire to ignition 12 volts (fused 3 amp), black wire to chassis ground (Fig 1).


Plug the harnesses into the PA module (Fig 2).

Mount the speakers in your desired locations with included hardware. To avoid feedback noise mount the speakers not pointing at the microphone. Note: Speaker wires may need to be extended.

If the components are unplugged during installation note the numbering on the plugs to reconnect.



(Fig 1)

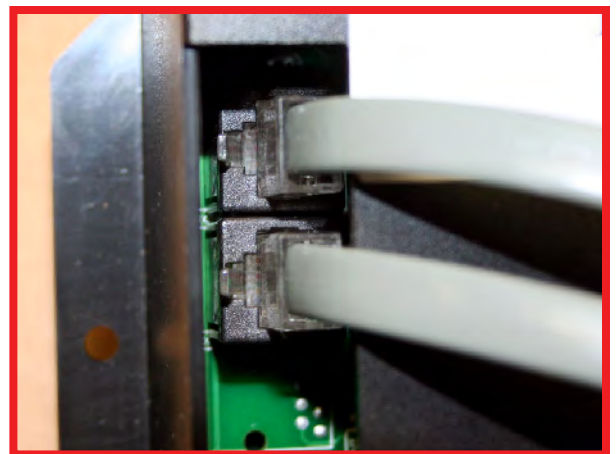

(Fig 2)



(Fig 3)

Operation

Turn the system on with the on/off switch and talk hands free. Adjust the volume to your desired level.