





INP013 CABLE DRIVE REGULATOR MOTOR INSTALLATION INSTRUCTIONS

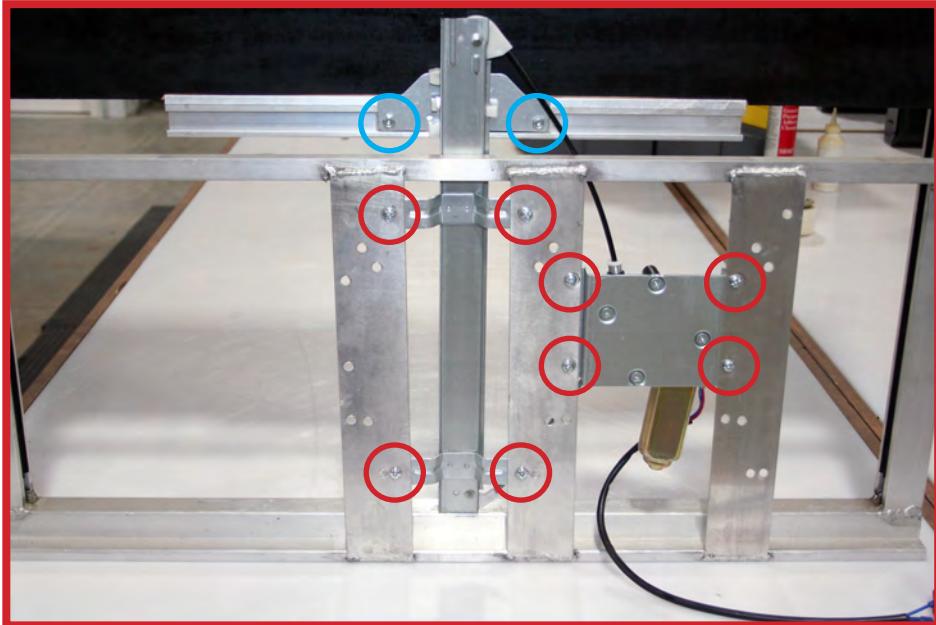


REMOVE REGULATOR

Raise partition so you can unbolt the track guides circled in blue. Disconnect the wires. Remove the mounting bolts circled in red. Remove regulator assembly.

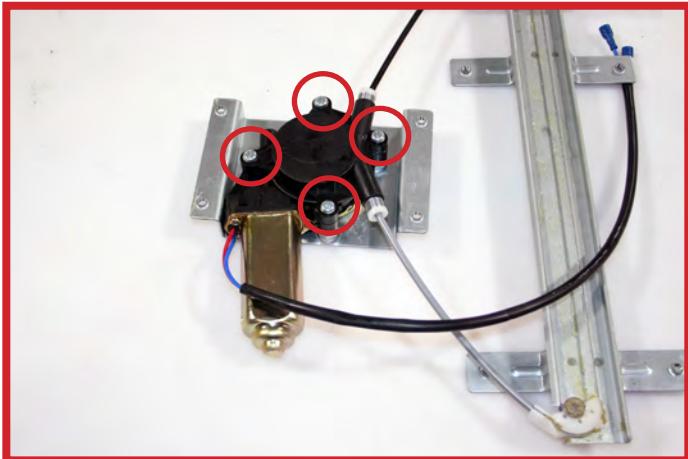

Remove the bolts circled in red. Separate the regulator from the motor using a flat blade screw driver.

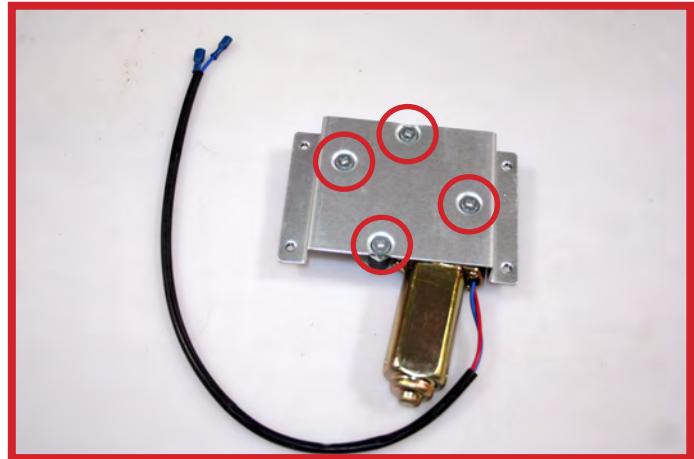


Remove the bolts circled in red to remove the motor from the mounting bracket.




INP013 CABLE DRIVE REGULATOR MOTOR INSTALLATION INSTRUCTIONS



With the motor placed on the regulator install the new long bolts circled in red.

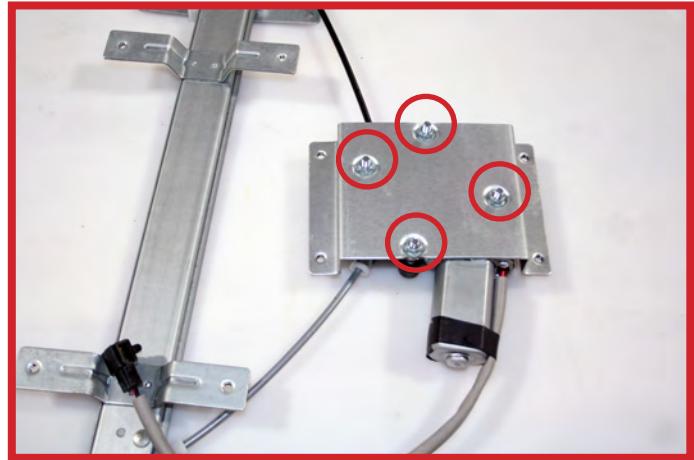

Turn the regulator over and place the motor mounting bracket onto the long bolts. Install the nylock nuts evenly circled in red.
Note: Do not over tighten.

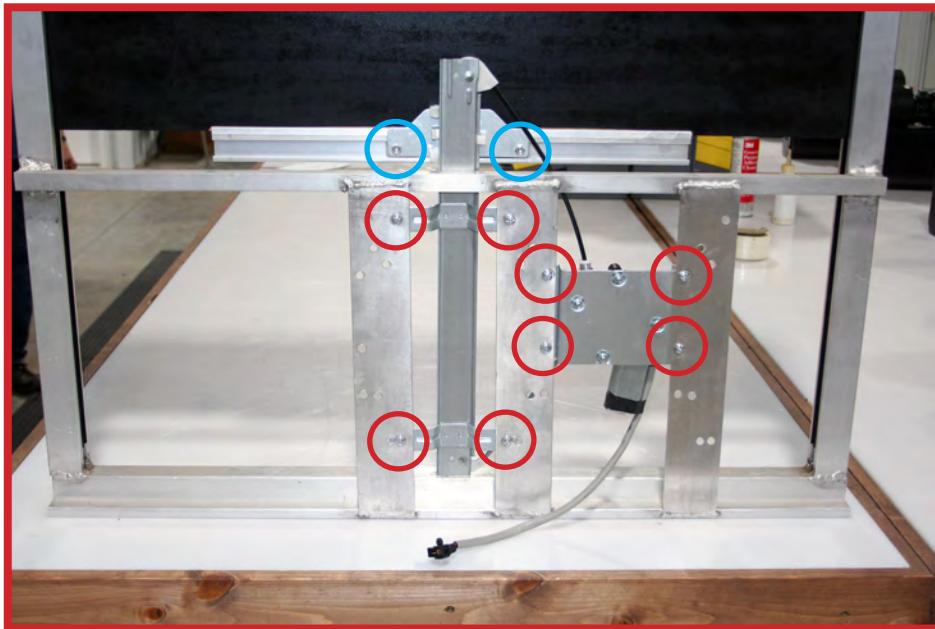

INSTALL REGULATOR

Place the regulator assembly back into the housing. Reinstall the mounting bolts circled in red. Raise partition so you can bolt the track guides circled in blue. Connect the wires and test.